




Interposer Module


The Interposer Module is a reel-to-reel feeding device which holds a full spool of interposer on the left side which is dispensed and then collected on the right. The Interposer Module is available in a manual or a fully automatic configuration applicable for use with all AMADA WELD TECH Hot Bar systems.

KEY FEATURES


- Independent modular design for optimum system integration
- Self-levelling mechanism for tape tension control
- Optional upgrade module for automatic tape feeding
- Sarcon tape ensures product protection and even pressure on bond area
- Kapton tape helps to eliminate hot bar pollution

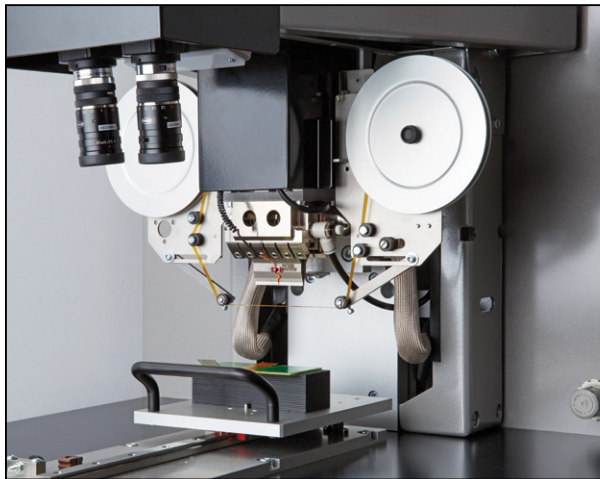


TYPICAL APPLICATIONS

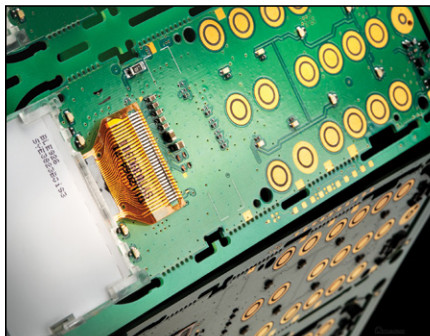

Hot bar reflow soldering application

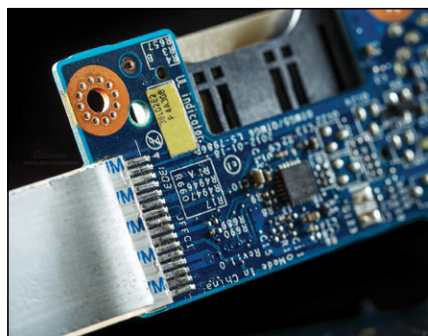

Hot bar reflow soldering application

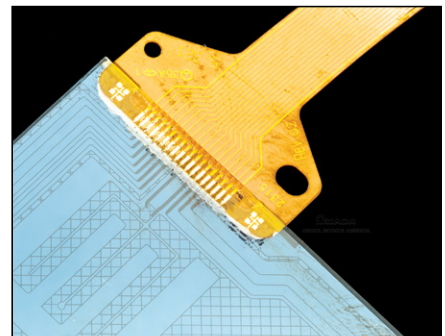

Hot bar bonding application

SARCON® INTERPOSER

Used for heat seal bonding and ACF laminating applications, Sarcon interposer material is used between the hot bar and the parts being bonded, compensating for small product flatness imperfections by applying bond force over the entire process area - even between the tracks, resulting in a stronger mechanical connection. Sarcon interposer also protects the thermode against glass splinters resulting from the high force bonding process.




SARCON INTERPOSER TAPE

Minimum tape feeding length	10 mm/step
Reel specification	Outside diameter 85 mm, 6 mm mounting hole*
Sarcon tape width	5 mm
Sarcon tape length	10 m
Sarcon tape thickness	0.45 mm
Material type	Aluminium oxide filled silicon rubber
Material color	Grey

* excluding mounting reels

KAPTON® INTERPOSER (HOT BAR REFLOW SOLDERING)

Used for hot bar reflow soldering applications, Kapton interposer (polyamide) is used between the hot bar and the parts to be bonded. In some applications, the hot bar is in direct contact with flux and/or solder material causing contamination which needs to be removed to avoid temperature drops. This cleaning process takes time and can shorten the useful life of the hot bar. Kapton interposer can protect both the thermode and the parts maintaining a high level of quality.

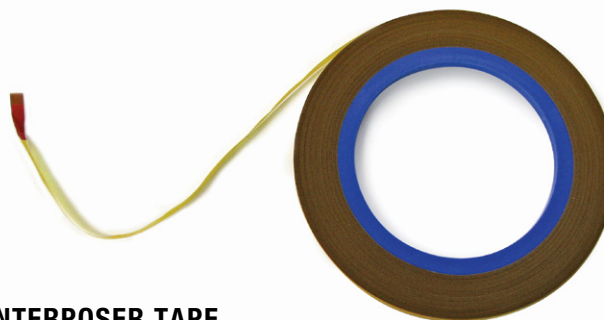

KAPTON INTERPOSER TAPE

Minimum tape feeding length	10 mm/step
Reel specification	Outside diameter 125 mm, inner diameter 75 mm *
Kapton tape width	5 mm
Kapton tape length	200 m
Kapton tape thickness	0.025 mm
Material type	Kapton (polyamide)
Material color	Brown

* excluding mounting reels



USA Headquarters and Western Technical Center

AMADA WELD TECH
1820 S. Myrtle Ave. • Monrovia, CA 91016 US • T: (626) 303-5676
info@amadaweldtech.com • www.amadaweldtech.com
ISO 9001:2015 Certified Company • 24/7 Repair Service: 1-866-751-7378

AMERICAS

AMADA WELD TECH
(Eastern Technical Center)
High Point, North Carolina
T: (941) 544-5762
southsales@amadaweldtech.com

AMADA WELD TECH
(Midwest Technical Center)
Detroit, Michigan
T: (248) 313-3078
midwestsales@amadaweldtech.com

AMADA WELD TECH
(Mexico Office)
El Paso, Texas
T: (915) 881-8765
mxsales@amadaweldtech.com

EUROPE
AMADA WELD TECH
GmbH
Munich, Germany
T: +49-89-839403-0
info@amadaweldtech.eu

ASIA

AMADA CO., LTD.
Isehara, Japan
T: +81-463-96-1111
amd_microweld_sales@amada.co.jp

AMADA WELD TECH
SHANGHAI CO., LTD.
Shanghai, China
T: +86-21-6448-6000
jwu@amadaweldtech.com.cn

AMADA WELD TECH KOREA CO., LTD.
Seoul, Korea
T: +82-31-8015-6810
amadasales@amadaweldtech.co.kr
sales2@amadaweldtech.co.kr

AMADA WELD TECH TAIWAN CO., LTD.
Taipei, Taiwan
T: +886-3-328-3511

AMADA (THAILAND) CO., LTD.
Bangkok, Thailand
T: +66-2170-5900
info@amada.co.th

AMADA VIETNAM CO., LTD.
Ha Noi, Vietnam
T: +84-4-6261-4583
thuyet@amada.co.jp

AMADA WELD TECH
INDIA PVT., LTD.
Bangalore, India
T: +91-80-4092-1749
info@amadaweldtech.in

Specifications subject to change without notice. Copyright© 2025 AMADA WELD TECH INC.
The material contained herein cannot be reproduced or used in any other way without the express written permission of AMADA WELD TECH INC. All rights reserved.

follow us on:

