



MAWA-300B

Pulsed Micro TIG Welder

Durable and reliable – this high performance **micro TIG welding** power supply is the perfect solution for welding coils and terminals, bus bars, and covered wires. Supplying between 30 and 300 amps of output power, this unit targets small components in the automotive, medical, battery, and electronics industry.


Unique **Touch Start** and **Pulsation** features offer a higher level of control as compared to competitive models, providing more consistent and reliable welds.

AMADA WELD TECH also supplies a full range of welding accessories for the MAWA-300B micro TIG welder, including torches, electrodes, torch stands, and safety helmets and gloves.

KEY FEATURES

- Capable of welding of conductive metals
- Pulsation feature significantly reduces porosity
- Touch start feature controls and identifies weld location
- Monitoring function checks the upper and lower limits of the current as well as the envelope of the waveform and identifies process errors.
- Capable of welding of dissimilar materials
- Digital programming interface facilitates easy pulse form control
- Supports multiple weld schedules
- Touchscreen

TYPICAL APPLICATIONS



Bus bars



Wire to bus bar



Bus bar




Tab welding

PULSATION

Pulsation allows the user to selectively turn the current on and off during the weld. The frequency can be up to 5 kHz for very rapid firing. **Pulsation** results in:


- Controlled heat input to the part
- Elimination of internal porosity and external dimples
- Uniform size and shape of welds

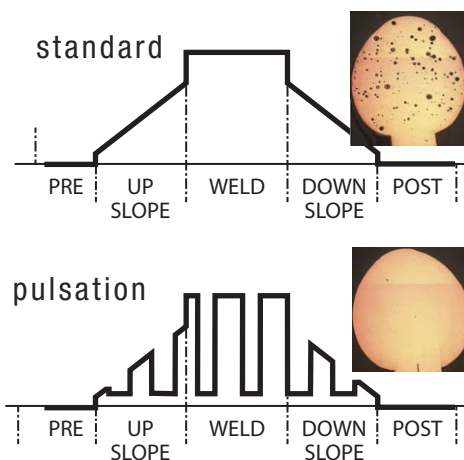

TOUCH START (OPTIONAL)

Touch Start drives the electrode to contact the workpiece and then retract at a given speed. The electrode starts firing in low current at a short distance from the part, controlling the location of the weld, and reducing the electrical noise emitted in the arc generation. Benefits of **Touch Start** include:

- Firing occurs as soon as the electrode starts to retract
- Low voltage operation – low HF noise
- Indicates and controls the location of the weld

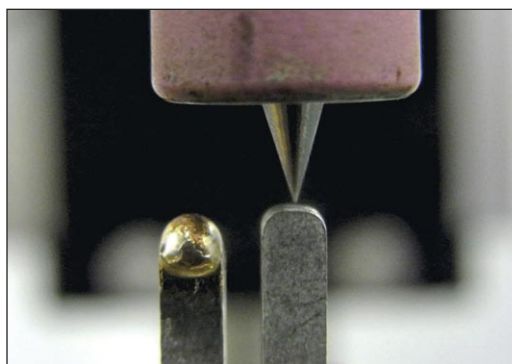

TECHNICAL SPECIFICATIONS

General		
Models	High Voltage Start	Touch Start
Power requirements	208 VAC , 3 phase, 50/60 Hz	
Power consumption	7.13 kVA (@max. duty cycle 5%)	
Control mode	Constant current	

Welding parameters		
Output current	30-300 A	
Weld time	0.1 - 2000 ms	
Pulsation frequency	1 - 5000 Hz	
Maximum duty cycle	5% @ 300 A	50% @ 80 A
Gas purge time	0.0 - 9.99 sec	

WEIGHT & DIMENSIONS

Dimensions (W x D x H)	8.3 in x 27.8 in x 16 in (211 mm x 705 mm x 408 mm)
Weight	100 lb (45 kg)



USA Headquarters and Western Technical Center

AMADA WELD TECH
1820 S. Myrtle Ave. • Monrovia, CA 91016 US • T: (626) 303-5676
info@amadaweldtech.com • www.amadaweldtech.com
ISO 9001:2015 Certified Company • 24/7 Repair Service: 1-866-751-7378

AMERICAS

AMADA WELD TECH
(Eastern Technical Center)
High Point, North Carolina
T: (941) 544-5762
southsales@amadaweldtech.com

AMADA WELD TECH
(Midwest Technical Center)
Detroit, Michigan
T: (248) 313-3078
midwestsales@amadaweldtech.com

AMADA WELD TECH
(Mexico Office)
El Paso, Texas
T: (915) 881-8765
mxsales@amadaweldtech.com

EUROPE
AMADA WELD TECH
GmbH
Munich, Germany
T: +49-89-839403-0
info@amadaweldtech.eu

ASIA

AMADA CO., LTD.
Isehara, Japan
T: +81-463-96-1111
amd_microweld_sales@amada.co.jp

AMADA WELD TECH
SHANGHAI CO., LTD.
Shanghai, China
T: +86-21-6448-6000
jvu@amadaweldtech.com.cn

AMADA WELD TECH KOREA CO., LTD.
Seoul, Korea
T: +82-31-8015-6810
amadasales@amadaweldtech.co.kr
sales2@amadaweldtech.co.kr

AMADA WELD TECH TAIWAN CO., LTD.
Taipei, Taiwan
T: +886-3-328-3511

Specifications subject to change without notice. Copyright© 2025 AMADA WELD TECH INC. The material contained herein cannot be reproduced or used in any other way without the express written permission of AMADA WELD TECH INC. All rights reserved.

AMADA (THAILAND) CO., LTD.
Bangkok, Thailand
T: +66-2170-5900
info@amada.co.th

AMADA VIETNAM CO., LTD.
Ha Noi, Vietnam
T: +84-4-6261-4583
thuyet@amada.co.jp

AMADA WELD TECH
INDIA PVT., LTD.
Bangalore, India
T: +91-80-4092-1749
info@amadaweldtech.in

follow us on:

