



BENCHMARK® GP-500A Gas Purification System

GP-500A is a 30 CFM standalone, automatic, regenerating, dual column inert gas purification system designed to continuously recirculate process gas from a glovebox through a filter column containing a mixture of oxygen and moisture getters. This closed-loop filtration process can achieve an ultra dry gas environment of about 1 ppm moisture and oxygen when integrated with typical AMADA WELD TECH BENCHMARK® gloveboxes.

GP-500A Plus has a 3.1 inch touch screen LCD display with built-in shortcut function keys which allows single button filter column selection or regeneration.


Also available in single and dual column manual configurations, the GP-500A's modular, low profile design means it can be easily integrated into most gloveboxes on the market.

ADVANTAGES

- Achieves ultra low oxygen and moisture environment levels quickly
- Closed-loop gas circulation for decreased process gas consumption
- Single push button automatic regeneration of filter media
- Quick glovebox integration using industry standard KF-40 flange connectors
- Modular, low profile design
- Single and dual column manual or automatic models

APPLICATIONS

- Ultra dry nitrogen or compressed dry air (CDA) welding environment for hermetic sealing electronic packages
- Recycling expensive glovebox process gas like argon while maintaining ultra dry environment conditions for laser welding applications like titanium, stainless steel and aluminum.

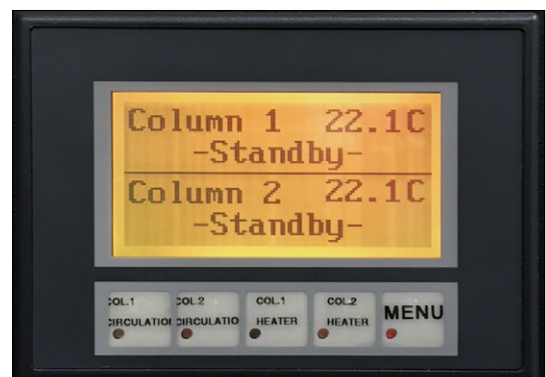

GP-500A PLUS front panel interface

TECHNICAL SPECIFICATIONS

* Moisture and Oxygen	Moisture level: 3 ppm (-70 dp°C) typically expected after 3 days of operation
	Oxygen level: 3 ppm typically expected after 3 days of operation
Certification	CE compliant


* Absorption rate test was based on an empty AX5000 56" glovebox, absorption rate is expected to decrease when equipment is in the glovebox.

FACILITY REQUIREMENTS


Power	Single phase 208-240 VAC, 20 A, 50/60 Hz
Regeneration forming gas	5% hydrogen 95% nitrogen (at least 270 cu ft / regeneration) 3/8" polyflow tube
Regeneration purge gas	100% nitrogen or argon (at least 15 cu ft / regeneration) 3/8" polyflow tube
Cooling water	12 to 30°C at a minimum flow rate of 1/2 GPM (1.9 LPM) 3/8" polyflow tube The installation area should be free of sudden temperature fluctuations and humidity should be ≤85% (non-condensing)
Gas circulation port	NW40 flange x 2

WEIGHT & DIMENSIONS

	GP-500A-M- SINGLE (Single Column Manual)	GP-500A-M- DUAL (Dual Column Manual)	GP-500A-P-DUAL ("PLUS" Dual Column Automatic)
Dimensions (W x D x H)	28 in x 35 in x 29 in (771 mm x 889 mm x 737 mm)	39 in x 35 in x 29 in (991 mm x 889 mm x 737 mm)	39 in x 35 in x 29 in (991 mm x 889 mm x 737 mm)
Weight	300 lb (136 kg)	400 lb (181 kg)	400 lb (181 kg)



GP-500A-M-SINGLE



GP-500A-M-DUAL



USA Headquarters and Western Technical Center

AMADA WELD TECH
1820 S. Myrtle Ave. • Monrovia, CA 91016 US • T: (626) 303-5676
info@amadaweldtech.com • www.amadaweldtech.com
ISO 9001:2015 Certified Company • 24/7 Repair Service: 1-866-751-7378

AMERICAS

AMADA WELD TECH
(Eastern Technical Center)
High Point, North Carolina
T: (941) 544-5762
southsales@amadaweldtech.com

AMADA WELD TECH
(Midwest Technical Center)
Detroit, Michigan
T: (248) 313-3078
midwestsales@amadaweldtech.com

AMADA WELD TECH
(Mexico Office)
El Paso, Texas
T: (915) 881-8765
mxsales@amadaweldtech.com

EUROPE
AMADA WELD TECH
GmbH
Munich, Germany
T: +49-89-839403-0
info@amadaweldtech.eu

ASIA

AMADA CO., LTD.
Isehara, Japan
T: +81-463-96-1111
amd_microweld_sales@amada.co.jp

AMADA WELD TECH
SHANGHAI CO., LTD.
Shanghai, China
T: +86-21-6448-6000
jvw@amadaweldtech.com.cn

AMADA WELD TECH KOREA CO., LTD.
Seoul, Korea
T: +82-31-8015-6810
amadasales@amadaweldtech.co.kr
sales2@amadaweldtech.co.kr

AMADA WELD TECH TAIWAN CO., LTD.
Taipei, Taiwan
T: +886-3-328-3511

AMADA (THAILAND) CO., LTD.
Bangkok, Thailand
T: +66-2170-5900
info@amada.co.th

AMADA VIETNAM CO., LTD.
Ha Noi, Vietnam
T: +84-4-6261-4583
thuyet@amada.co.jp

AMADA WELD TECH
INDIA PVT., LTD.
Bangalore, India
T: +91-80-4092-1749
info@amadaweldtech.in

Specifications subject to change without notice. Copyright© 2025 AMADA WELD TECH INC.
The material contained herein cannot be reproduced or used in any other way without the express written permission of AMADA WELD TECH INC. All rights reserved.

follow us on:



06/25